



Download The
Software:
SmartCharge
Please
remember to
Sign up first



Product Guide – AC EV Charger

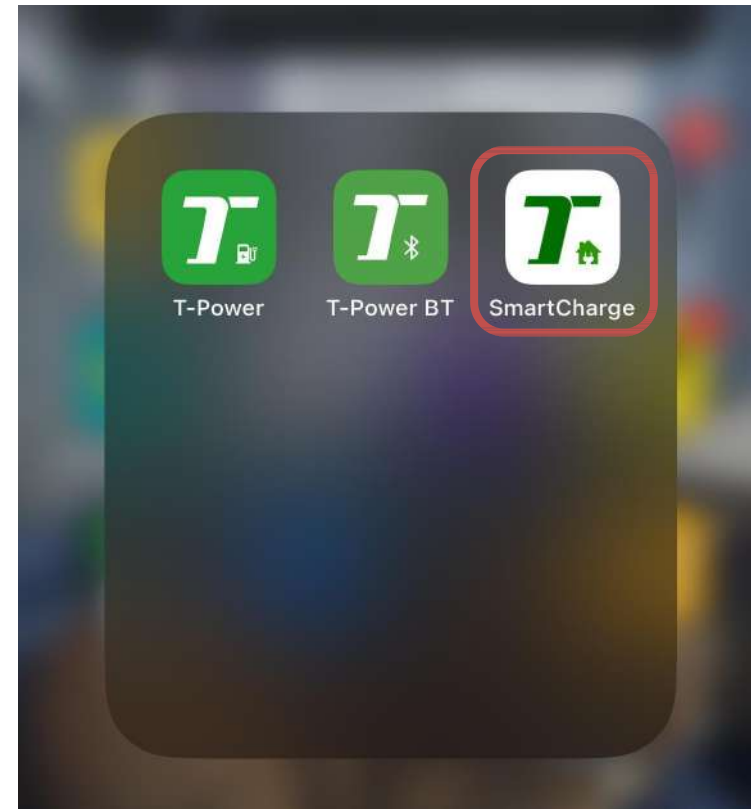

Click Connect to Bluetooth

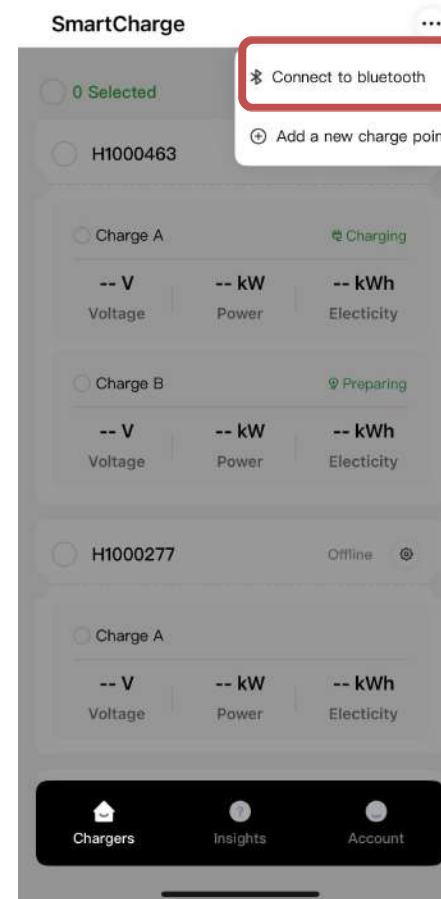

Product Guide – AC EV Charger






Scan this QR code on product:



Product Guide – AC EV Charger



Click Network configuration

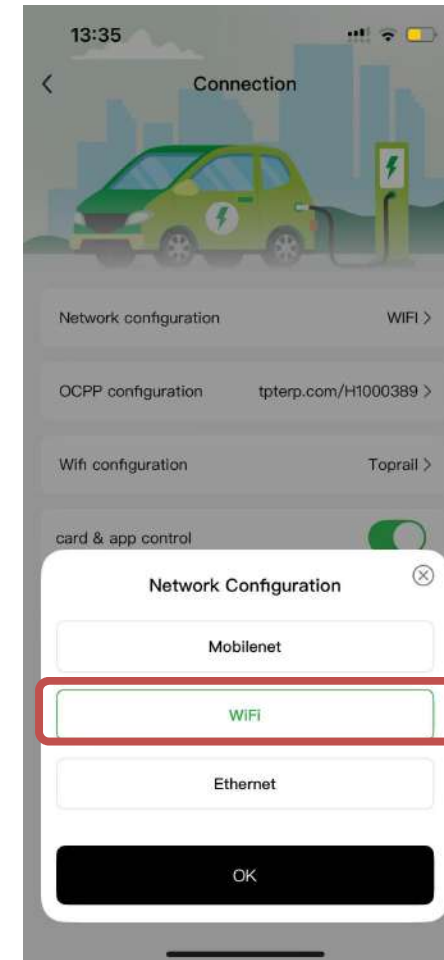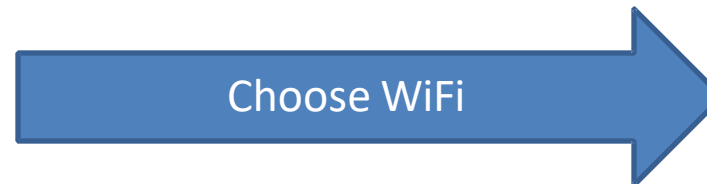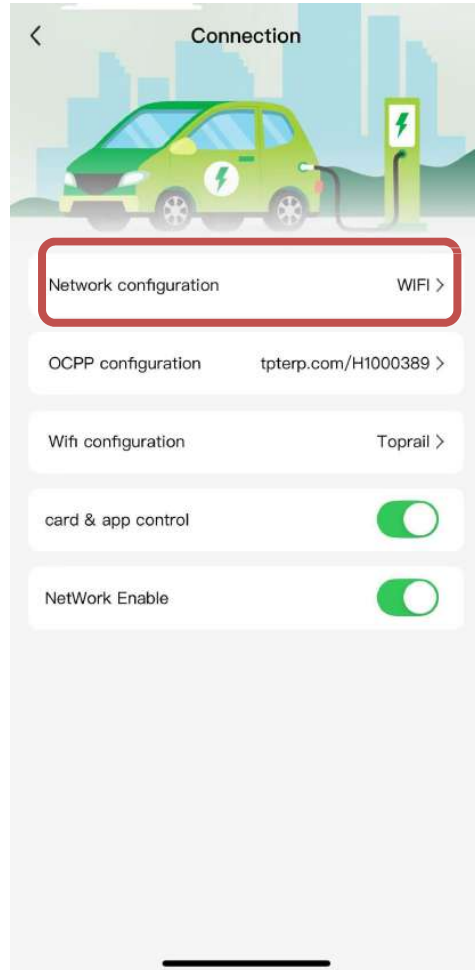

Product Guide – AC EV Charger

A screenshot of a mobile application's 'OCPP configuration' screen. At the top, there is a back arrow and the title 'OCPP configuration'. Below this, there is a toggle switch labeled 'OCPP Enable' which is currently turned on (green). Underneath the toggle are four input fields: 'Ws (s) ://', 'ID Tag', and 'Port'. The 'Ws (s) ://' field contains the text 'tpterp.com >'. The 'ID Tag' field contains the text 'H1000389 >'. The 'Port' field contains the text '9001 >'. At the bottom of the screen is a large green button labeled 'Save'.

Open it

Enter: tpterp.com

Customer will be provided an ID tag after they made a purchase in form of: Hxxxxxxx

Enter: 9001

Click Save

Product Guide – AC EV Charger



< WI-FI Configuration

Please enter wifi name and password

Toprail




Make sure your phone connect to WiFi first. The app will detect it automatically

Enter your WiFi Password

Confirm

Click Confirm


Product Guide – AC EV Charger

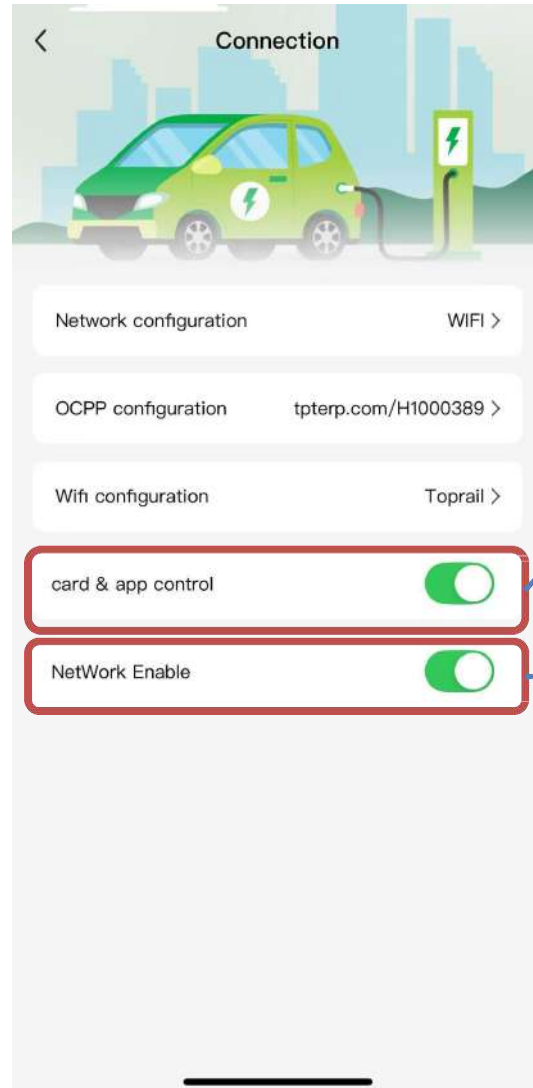

Turn on card&app control
Able to use app and swipe card to control the charge to start and stop
Trun off --> plug in & charge

Turn on: Wi-Fi connection App & Card available
Turn off: Card Only

Product Guide – AC EV Charger

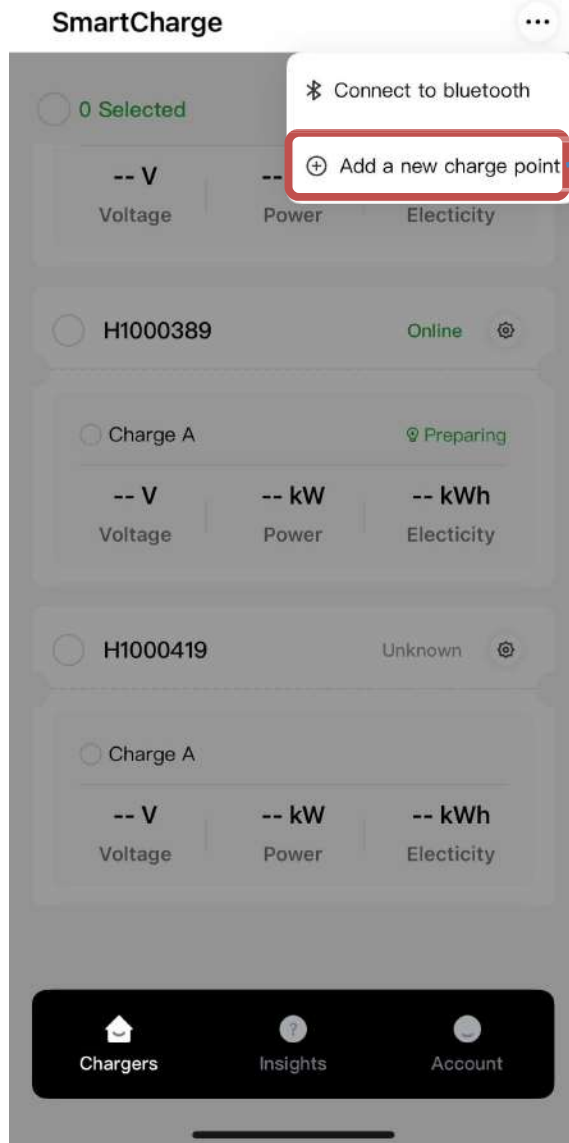

Back to home page and click Add a New Charge Pont



Product Guide – AC EV Charger



Fill in the details

The charge point details will be visible to those with access to it.

Serial Number

Location of the charge point

* Please provide at least the suburb information for the charge point. This will help us deliver more accurate details, including electricity prices and energy usage analytics for you.

Confirm



Your Location


Click Confirm

Turn off the charger by isolator and
then wait for 30s


Turn on again

Wait for 30s

Product Guide – AC EV Charger

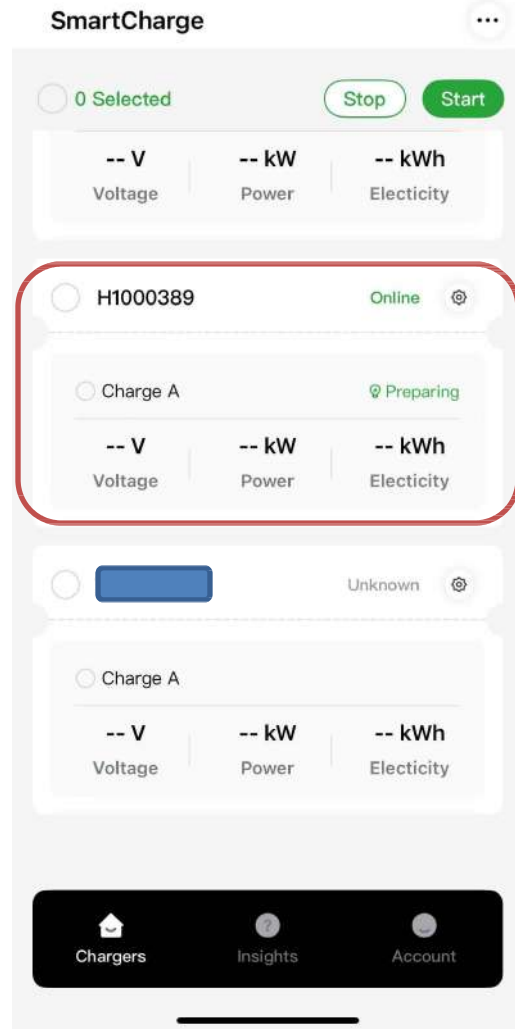


**Charger shows on the
home page
&
Click in to start charging**

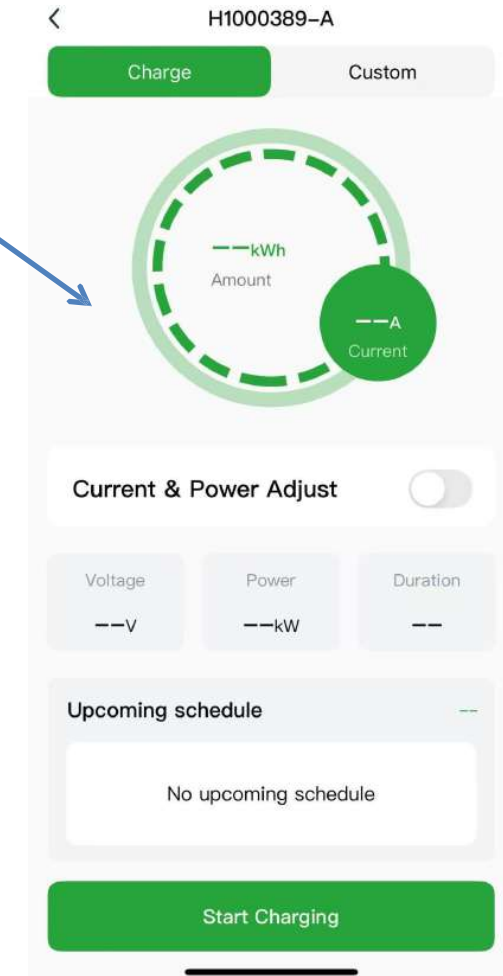


**Please remember to plug in
the charger gun to EV first!!!!**

Product Guide – AC EV Charger

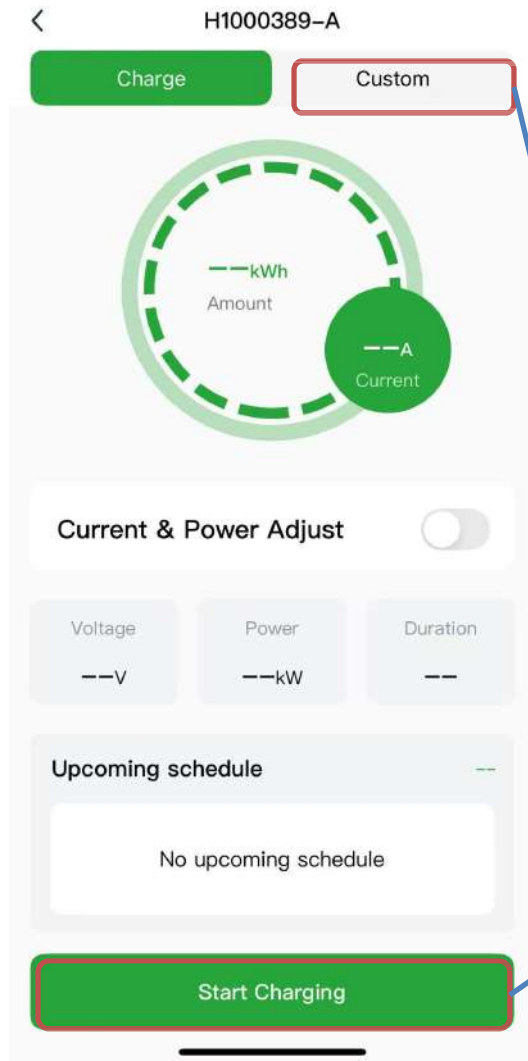

**Scheduling
charging
time**

**Click Start
Charging
Charging
will start**

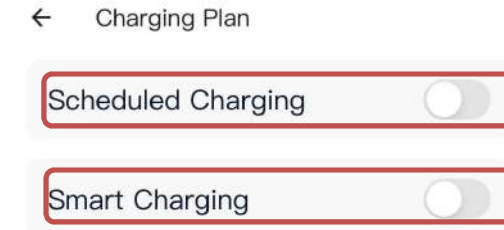

**Open
those
two**



Product Guide – AC EV Charger



← Charging Plan

Scheduled Charging ☒

Set a start time:

12 : 00

Hour Minute

Repeat: ☒ No ☐ Daily ☐ Weekly

Select a start day :


Mon Jul 14, 2025

July 2025

SU	M	TU	W	TH	F	SA
		1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30	31		

Cancel Set

**Set up
starting
time**



← Charging Plan

27 28 29 30 31

Smart Charging ☒

☒ Current ☐ Power

session

Current

6A 19A 32A


Duration

0h 12h 24h

+ Add a new session

Cancel Set

**Set up how
long the
charging
last for**



**Click Set the
Appointment will
show on the
home page**

← H1000389-A

Charge Custom


H1000389 - A

⚡ Charge No Repeat | Start Date 15/07/2025

32A Start 12:00 End +1 00:00

Set

Product Guide – AC EV Charger

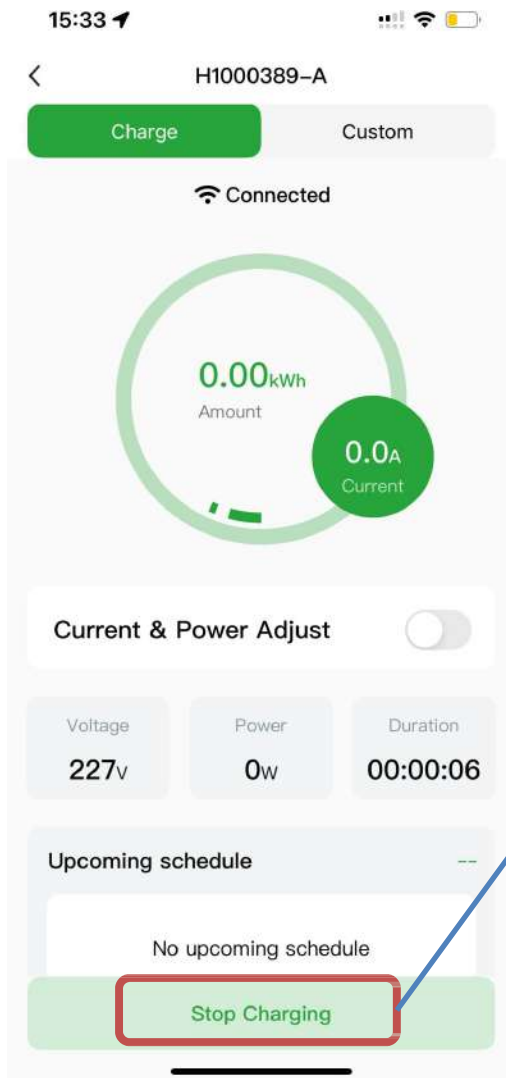

1. Click Stop charging before you unplug (must be same account)

2. Swipe card to stop charging (must be same card)

Attention! If pervious methods don't work **press the red bottom** on the right hand side to stop the indicator will turn red

**After the charger stop working
Then unplug the gun**
(Unplug the gun in EV side first for BYD model)

